






OCS

FPM fitting

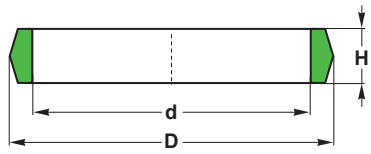

OCS



OCS Seals are assembled with fittings according to DIN - ISO 8434-1. The-Standard materiel used is FPM rubber.

On request, we can produce them in other elastomers.

Operating conditions

Pressure ≤ 80 MPa
Temperature -10°C to 200°C

Materials

FPM FPM 80 Sh A

Assembly

Axial: in open housings

Application

For fittings DIN - ISO 8434-1

Advantages

- Good extrusion resistance-
- Long-Service-Life
- Easy assembly because the Seal is maintained in its housing
- Good resistance to vibration and high temperatures

Please contact us for applications approaching maximum values.

d	D	H	Reference
6	8	2,7	OCS-06-LS
8	10	2,7	OCS-08-LS
10	12,2	2,95	OCS-10-LS
12	14,2	2,95	OCS-12-L
15	17,2	2,95	OCS-15-L
18	20,2	2,95	OCS-18-L
22	24,2	2,95	OCS-22-L
28	30,2	2,95	OCS-28-L
35	37,8	3,5	OCS-35-L
42	44,8	3,5	OCS-42-L
16	18,2	2,95	OCS-16-S
20	23	3,7	OCS-20-S
25	28	3,7	OCS-25-S
30	33	3,85	OCS-30-S
38	40,8	3,5	OCS-38-S