




0DR

Seals for 9000 psi flanges

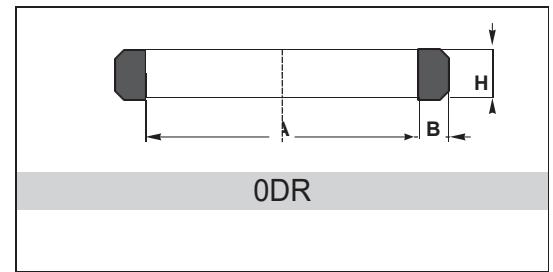

The **0DR** is designed to replace traditional seals in flange seal applications. With bidirectional sealing capability, the **0DR** provides exceptional sealing for static seal applications.

The rectangular base offers stability, preventing seal rolling and the leaks or seal failures commonly associated with a rolled or twisted seal.

Operating conditions

Pressure	≤ 42 MPa
Temperature	-40 to 100°C
Fluids	mineral oils

Materials

NBR	NBR 90 Sh A
-----	-------------

Assembly

On CAT® flanges

Advantages

- Good extrusion resistance
- Long service life
- Easy assembly because the seal is maintained in its housing (captive mounting)
- Good resistance to vibration and low temperatures

Please contact us for applications approaching maximum values.



A	B	H	Reference
18,9	3,4	4,95	0DR-1P3700
25,25	3,4	4,95	0DR-1P3702
31,6	3,4	4,95	0DR-1P3703
37,95	3,4	4,95	0DR-1P3704
44,37	3,4	4,95	0DR-1P3705
50,72	3,4	4,95	0DR-1P3706
54,2	3,4	4,95	0DR-1P3707
57,07	3,4	4,95	0DR-1P3708
63,42	3,4	4,95	0DR-1P3709